


SPECIFICATIONS

Voltage rating: 250V AC, DC
 Current rating: 10A, AC, DC
 Withstanding Voltage: 1500V AC/minute
 Insulation resistance: 1000M Ω min
 Temperature range: -25 °C - +85 °C
 Applicable PC board thickness: 1.6mm
 Contact resistance: Initial Value/10m Ω max
 After environmental Texting/20m Ω

HOUSING

Part No: SCT60020FHA-08P
 Material: Nylon 66 UL 94V-2
 Q'TY: 500, 1000 pcs/bag

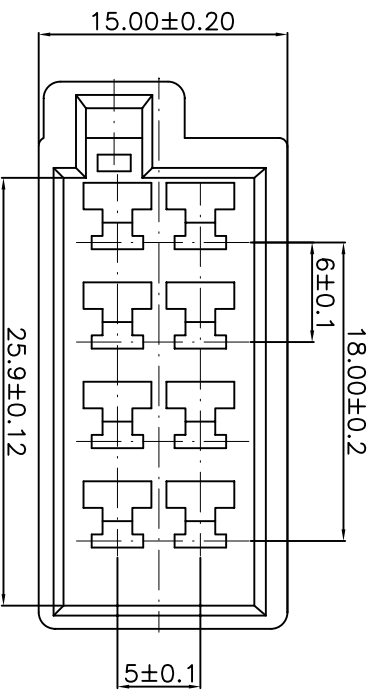

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	SCALE	 森康达电子有限公司 SCONDAR ELECTRONIC LIMITED	PART NO. SCT60020FHA-08P TITLE: 60020 MALE HOUSING DRAWING NO. SCT60020
0	05/12/27	NEW			~ 10 ±0.15 20 ~ 30 ±0.30 30 ~ Angle ±0.50 DIM ± 2' TOL	DESIGN CHECK APPROVE	UNIT mm SIZE A4 SHEET 1/1 PROJ.		
1						judy	2002.03.05		
						hellen	2002.03.05		