


1 2 3 4 5 6 7 8 9 10

■ 技术参数 (SPECIFICATIONS)

- ◆ 额定电压: 250V AC DC
 - ◆ Voltage rating: 250V AC DC
 - ◆ 额定电流: 12.0A AC DC MIN
 - ◆ Current rating: 12.0A AC DC MIN
 - ◆ 耐压值: 1500V AC/minute
 - ◆ Withstand voltage: 1500V AC/minute
 - ◆ 绝缘电阻: 1000MΩ MIN
 - ◆ Insulation resistance: 1000MΩ MIN
 - ◆ 接触电阻: 20mΩ MAX
 - ◆ Contact resistance: 20mΩ MAX
 - ◆ 工作温度: -25°C ~ +85°C
 - ◆ Working Temperature: -25°C +85°C
 - ◆ 间距: 6.0mm 9.0 mm
 - ◆ Pitch: 6.0 mm 9.0mm
- 材料 (MATERIAL)
- ◆ 插头: ABS
 - ◆ Housing: ABS

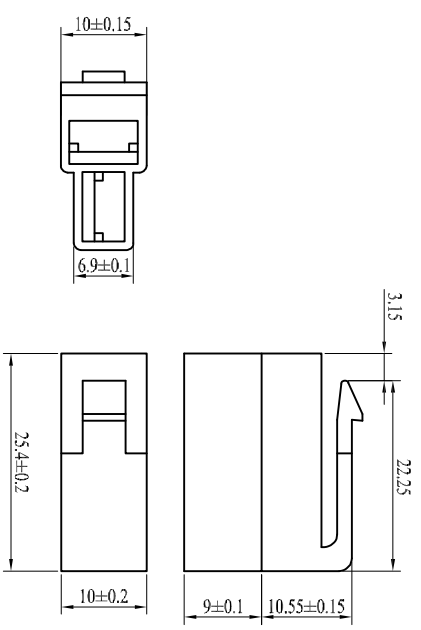

1	A	WIRE: SCT63090MH-02P	QTY	1
NO	ITEM	SPECIFICATION	QTY	UNIT

		OPERATION	DRAW	Troye	2019.11.20	SCALE	SCONDAR 森康达电子有限公司 SCONDAR ELECTRONIC LIMITED	
		~ 10	DESIGN			UNIT	TITLE:	
		±0.15	CHECK	Lisa.L	2019.11.20	mm	Molex 63090 02P Male Housing	
		20 ~ 30	APPROVE	Allen.ZH	2019.11.20	A4	DRAWING NO. SCT63090MH-02P	
		±0.30				1/1		
		30 ~				PROJ.		
		±0.50						
		Angle						
		± 2'						
		DIM TOL						
0	Mar-14-18	NEW						
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE				

H 1 2 3 4 5 6 7 8 9 10